



# D01S Thermal Transfer Overprinter

S Series TTO is world class cost effective smart coding machine, mainly used in flexible package area like food, pharmaceutical, daily chemical, seed, daily tissue, etc.

S Series Advantages: Bi-motro control, up to 0.5mm precise print gap; wider print speed range, min. 20mm/s to max 670mm/s; add ribbon save modes, improve the usage rate; suitable for automatic material handling line, avoid miss prints and print position deviation; add network interface, can communicate to related system.

## Enhance Your Brand

300DPI resolution, ensures superior print appearance and makes your products out of the ordinaries.

## Enhance Your Efficiency

Print real time, date and lot number; work file can be changed easily; max 600m ribbon length, reduce machine downtime; friendly UI and operation; easy to learn designer program. Reduce TCO.

## Protect Your Property

Adopts 32mm print head, suitable for 22~32mm ribbon width, deploy properly to meet different applications; min. 0.5mm print gap; distinct, good adhesion on the film, avoid unexpected complaints. Reduce Cost.

## Protect Your Channels

Print variable QR Code, barcode with our self designed system to fulfill tracing and traceability, anti-counterfeit, protect your channels.



SHANGHAI DIKAI CODING TECHNOLOGY CO.,LTD

Add:Building No.1,SCI-TECH ONE, No. 489 Wenchuan Road, Baoshan District, Shanghai 201906,PRC

Tel/Whatsapp:+86 13764900450

www.dkcoding.net Email: info@dkcoding.net

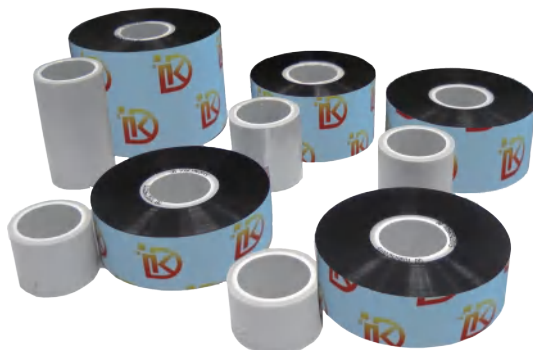
**Features:**

	D01S Intermittent	D01S Continuous
Print Head	32mm width,300dpi(12 dots/mm)	
Print Area	32mm x 60mm	32mm x 100mm
Print Speed	6-20m/m	up to 40m/m
Frequency	max 300 PPM	max 300 PPM
Ribbon Length	500m	
Ribbon Width	22mm~33mm	
Interface	USB, RS232, Ethernet	
Voltage	AC100-240V 50/60Hz	
Power	200W	
Work Temperature	0~40°C	
Relative Humidity	10%~95% (non condensity)	
Air Supply	6bar/90psi (max), dry, non-polluted air	
Weight	Printer Unit:8.5KG, Controller: 2.0KG	
Dimension (unit: mm)	Printer Unit 188x190x180	Controller: 175x235x110

**Thermal Transfer Ribbon:**

Model	Grade	Features
DG	WAX/ RESIN	Cost effective to meet most printing requirements.
DC	PREMIUM WAX/RESIN	Better adhesion, cost effective.
DT	RESIN	Superior adhesion, for high quality prints.
DCLL	COMBINED	Better adhesion, cost effective.

Available color: black, white Length: 500,m  
Ask sales for other colors.


**Print Results:**
